


229.00 EUR
incl. 19% VAT, plus [shipping](#)

- NVidia Jetson !
- Carrier Board !

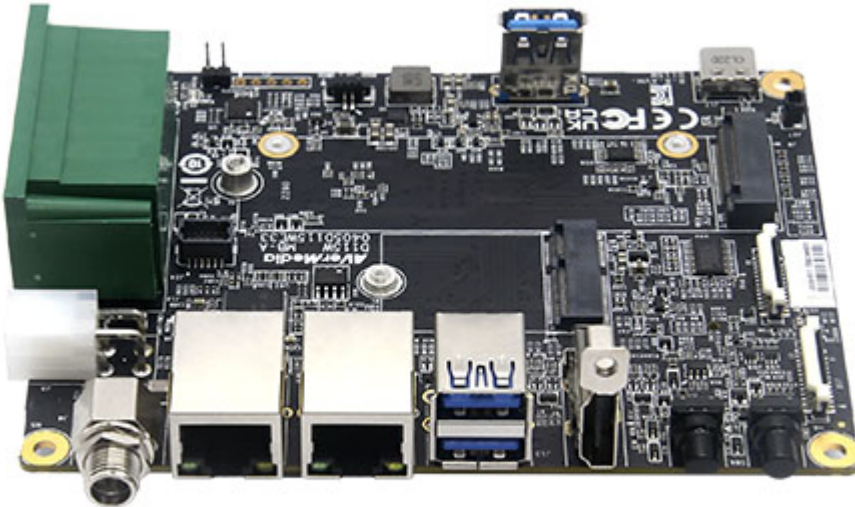

AVerMedia's AI Carrier board D115W applies to NVIDIA® Jetson Orin NX/Orin Nano module. This efficient system-on-module (SoM) opens new worlds of embedded IoT applications with full analytic capabilities.

D115W is designed for the industry applications with spatial concern and feature a rich assortment of I/O ports for rapid AI-based solution development and seamless deployment as required by demanding business applications.

AVerMedia supports businesses of all sizes and offers customizable BSP services, flexible MoQ, in addition to NVIDIA's JetPack™ SDK.

Stay Ahead with AVerCooler – Achieving 5°C Lower Operation under Others' Regular Workload for Enhanced NVIDIA Jetson Efficiency, Extended Lifespan, and Superior Performance.

- Applies to NVIDIA® Jetson Orin NX/Orin Nano
- 2 x 4 Lane MIPI CSI-2 MIPI Camera input
- 2 x M.2. for WIFI and SSD and 1 x HDMI output
- 2 x GbE RJ-45 (Optional: Ethernet 1 for PoE)
- 2 x GbE RJ-45, 3 x USB 3.2 and 20-pins expansion header
- Operating temperature: -40°C ~ 85°C
- Dimension: 120mm x 90mm(4.72" x 3.54")

Model Type
NVIDIA GPU SoC Module Compatibility

D115W Carrier Board
NVIDIA® Jetson Orin NX 16G/8G module
NVIDIA® Jetson Orin Nano 8G/4G module
2x GbE RJ-45

Networking

(Optional: Ethernet 1 for PoE*)
1xM.2. key E 2230 for wifi

Display Output

1 x HDMI output 3840 x 2160 at 60Hz for Orin NX,30Hz for Orin Nano

| | |
|--|--|
| Temperature | Operating temperature -40°C~85°C |
| | Storage temperature -40°C ~ 85°C |
| | Relative humidity 40 °C @ 95%, Non-Condensing |
| MIPI Camera Inputs(Internal) | 2x 4 lane MIPI CSI-2, 22 pin FPC 0.5mm Pitch Connector |
| USB | 1x USB 2.0 type C for recovery |
| | 3x USB 3.2 Type-A |
| Storage | 1x M.2. key M 2280 for NVMe |
| Expansion Header | 20 pins: 2x I2C, 2x UART, 4x GPIOs, 1xCAN (EU terminal block) |
| Power requirement | DC in JACK on board & ATX 4pin |
| | 12V/5A, 9V~24V is recommended. |
| Power Cord | US/JP/EU/UK/TW/AU/CN (optional) |
| Thermal solution | Heat sink with fan (optional) |
| Buttons | Power and Recovery |
| RTC Battery | Support RTC battery and Battery Life Monitoring by MCU |
| | 120mm x 90mm(4.72" x 3.54") |
| PCB/Electronics Mechanical Info | Weight: 125 g |
| Certifications | CE, FCC, KC(TBA) |
| Package | 1x D115W Carrier board |
| | Terminal blocks and screws |